

To enjoy the benefits of your AQUA ENERGIZER™, it must be installed by a licensed plumber. Installation by anyone other than a licensed plumber voids the warranty.



AQUA ENERGIZER™

Under Sink Device

Installation Instructions

Specification

Weight: 1 lb 2 ounces


Length: 6 inches

Materials: Copper, Quartz, Minerals

Water Pressure: Approved for up to 80 psi


Fittings: Nipples with 1/2 inch male pipe thread

This AQUA ENERGIZER™ device is equipped with Nipples with 1/2 inch male pipe thread. Thread seal tape (aka plumbers tape) may be needed for installation.

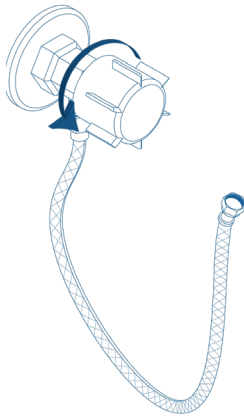


Step 1

Shut off the water supply.

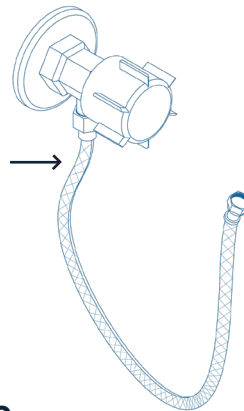


Step 2

Locate supply line for sink.

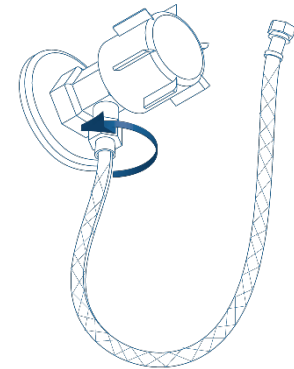


Step 3

Detach braided hose from supply line.

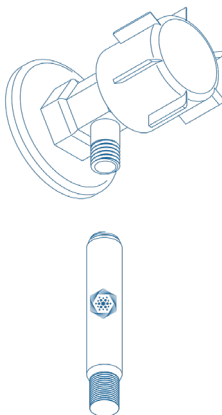


Step 4

Place AQUA ENERGIZER female fitting onto supply line.

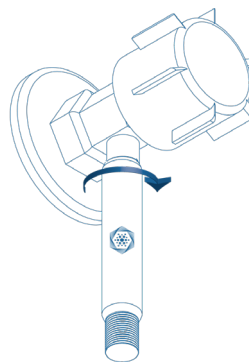

Step 5

Rotate clockwise until snug.

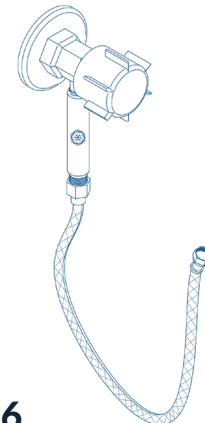

Step 6

Reattach hose to 1/2 inch AQUA ENERGIZER male adapter and rotate clockwise until snug.